

# Lecture Notes 8: Dynamic Optimization

## Part 2: Optimal Control

Peter J. Hammond

2025 September 28th; typeset from `optControl25.tex`

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## Statement of Basic Optimal Growth Problem

A **consumption path**  $\mathbf{C}$  is a mapping  $[t_0, t_1] \ni t \mapsto C(t) \in \mathbb{R}_+$ .

A **capital path**  $\mathbf{K}$  is a mapping  $[t_0, t_1] \ni t \mapsto K(t) \in \mathbb{R}_+$ .

Given  $K(t_0)$  at the initial time  $t_0$ , the benevolent planner's **objective** is to choose the pair  $(\mathbf{C}, \mathbf{K})$  in order to maximize

$$J(\mathbf{C}, \mathbf{K}) := \int_{t_0}^{t_1} e^{-rt} u(C(t)) dt$$

subject to the continuum of equality constraints

$$C(t) = f(K(t)) - \dot{K}(t)$$

Introduce the **Lagrange multiplier path**  $\mathbf{p}$  as a mapping  $[t_0, t_1] \ni t \mapsto p(t) \in \mathbb{R}_+$ .

Use it to define the **Lagrangian integral**

$$\mathcal{L}_{\mathbf{p}}(\mathbf{C}, \mathbf{K}) = \int_{t_0}^{t_1} e^{-rt} u(C(t)) dt - \int_{t_0}^{t_1} p(t) [C(t) - f(K(t)) + \dot{K}(t)] dt$$

## Integrate by Parts

So we have the “Lagrangian”

$$\mathcal{L}_p(\mathbf{C}, \mathbf{K}) = \int_{t_0}^{t_1} e^{-rt} u(C(t)) dt - \int_{t_0}^{t_1} p(t) [C(t) - f(K(t)) + \dot{K}(t)] dt$$

Integrating the last term in  $\dot{K}(t)$  by parts yields

$$- \int_{t_0}^{t_1} p(t) \dot{K}(t) dt = - \left|_{t_0}^{t_1} p(t) K(t) + \int_{t_0}^{t_1} \dot{p}(t) K(t) dt \right.$$

Hence

$$\mathcal{L}_p(\mathbf{C}, \mathbf{K}) = \int_{t_0}^{t_1} [e^{-rt} u(C) + \dot{p} K - p C + p f(K)] dt - \left|_{t_0}^{t_1} p(t) K(t) \right.$$

For the moment we ignore the last “endpoint terms”,  
and consider just the integral

$$\mathcal{I}_p(\mathbf{C}, \mathbf{K}) := \int_{t_0}^{t_1} [e^{-rt} u(C) + \dot{p} K - p C + p f(K)] dt$$

## Maximizing the Integrand

Evidently the two paths  $t \mapsto C(t)$  and  $t \mapsto K(t)$  jointly maximize the integral

$$\mathcal{I}_{\mathbf{p}}(\mathbf{C}, \mathbf{K}) = \int_{t_0}^{t_1} [e^{-rt} u(C) + \dot{p} K - p C + p f(K)] dt$$

with  $\mathbf{p}$  fixed, if and only if, for almost all  $t \in (t_0, t_1)$ , the pair  $(C(t), K(t))$  jointly maximizes w.r.t.  $C$  and  $K$  the integrand

$$e^{-rt} u(C) + \dot{p} K - p C + p f(K)$$

The first-order conditions for maximizing this integrand, at any time  $t \in (t_0, t_1)$ , are found by differentiating partially:

1. w.r.t.  $C(t)$  to obtain  $e^{-rt} u'(C(t)) = p(t)$ ;
2. w.r.t.  $K(t)$  to obtain  $\dot{p}(t) = -p(t) f'(K(t))$ ;

There is also the equality constraint  $\dot{K}(t) = f(K(t)) - C(t)$ .

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## Statement of Sufficient Conditions

Consider the static problem of maximizing the objective function  $\mathbb{R}^n \supseteq D \ni \mathbf{x} \mapsto f(\mathbf{x}) \in \mathbb{R}$  subject to the vector constraint  $\mathbf{g}(\mathbf{x}) \leq \mathbf{a} \in \mathbb{R}^m$  where  $\mathbb{R}^n \supseteq D \ni \mathbf{x} \mapsto \mathbf{g}(\mathbf{x}) \in \mathbb{R}^m$ .

### Definition

The pair  $(\mathbf{p}, \mathbf{x}^*) \in \mathbb{R}^m \times \mathbb{R}^n$  jointly satisfies **complementary slackness** just in case:

$$(i) \mathbf{p}^\top \geq 0; \quad (ii) \mathbf{g}(\mathbf{x}^*) \leq \mathbf{a}; \quad (iii) \mathbf{p}^\top [\mathbf{g}(\mathbf{x}^*) - \mathbf{a}] = 0$$

The three conditions can be written as  $\mathbf{p}^\top \geq 0$ ,  $\mathbf{g}(\mathbf{x}^*) \leq \mathbf{a}$  (comp).

### Theorem

Suppose that  $\mathbf{x}^* \in \mathbb{R}^n$  is a global maximum over the domain  $D$  of the Lagrangian function  $\mathcal{L}_{\mathbf{p}}(\mathbf{x}) = f(\mathbf{x}) - \mathbf{p}^\top [\mathbf{g}(\mathbf{x}) - \mathbf{a}]$  where  $(\mathbf{p}, \mathbf{x}^*) \in \mathbb{R}^m \times \mathbb{R}^n$  jointly satisfy the complementary slackness conditions.

Then  $\mathbf{x}^*$  is a global maximum of  $f(\mathbf{x})$  subject to  $\mathbf{g}(\mathbf{x}) \leq \mathbf{a}$ .

## Proof of Sufficient Conditions

Proof.

By definition of the Lagrangian  $\mathcal{L}_{\mathbf{p}}(\mathbf{x}) = f(\mathbf{x}) - \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}) - \mathbf{a}]$ , for every  $\mathbf{x} \in D$  one has

$$f(\mathbf{x}) - f(\mathbf{x}^*) = \mathcal{L}_{\mathbf{p}}(\mathbf{x}) + \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}) - \mathbf{a}] - \mathcal{L}_{\mathbf{p}}(\mathbf{x}^*) - \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}^*) - \mathbf{a}]$$

By hypothesis one has  $\mathcal{L}_{\mathbf{p}}(\mathbf{x}) \leq \mathcal{L}_{\mathbf{p}}(\mathbf{x}^*)$  for all  $\mathbf{x} \in D$ , so

$$f(\mathbf{x}) - f(\mathbf{x}^*) \leq \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}) - \mathbf{a}] - \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}^*) - \mathbf{a}] = \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}) - \mathbf{g}(\mathbf{x}^*)]$$

But the complementary slackness conditions

$$\mathbf{p}^{\top} \geq \mathbf{0}, \quad \mathbf{g}(\mathbf{x}^*) \leq \mathbf{a} \text{ (comp)}$$

imply that for any  $\mathbf{x} \in D$  satisfying the constraint  $\mathbf{g}(\mathbf{x}) \leq \mathbf{a}$  one has  $\mathbf{p}^{\top} \mathbf{g}(\mathbf{x}) \leq \mathbf{p}^{\top} \mathbf{a}$ , whereas  $\mathbf{p}^{\top} \mathbf{g}(\mathbf{x}^*) = \mathbf{p}^{\top} \mathbf{a}$ .

Hence  $f(\mathbf{x}) - f(\mathbf{x}^*) \leq \mathbf{p}^{\top}[\mathbf{g}(\mathbf{x}) - \mathbf{g}(\mathbf{x}^*)] \leq \mathbf{p}^{\top} \mathbf{a} - \mathbf{p}^{\top} \mathbf{a} = 0$ . □

## A Cheap Result on Necessary Conditions

Recall that we are considering the problem of choosing  $\mathbf{x} \in D \subseteq \mathbb{R}^n$  in order to maximize  $f(\mathbf{x})$  subject to  $\mathbf{g}(\mathbf{x}) \leq \mathbf{a}$ .

Suppose we know that any solution  $\mathbf{x}^* \in D$  must be unique.

This will be the case, for example, if:

1. the common domain  $D$  of the functions  $D \ni \mathbf{x} \mapsto f(\mathbf{x}) \in \mathbb{R}$  and  $D \ni \mathbf{x} \mapsto \mathbf{g}(\mathbf{x}) \in \mathbb{R}^m$  is a convex subset of  $\mathbb{R}^n$ ;
2. the objective function  $D \ni \mathbf{x} \mapsto f(\mathbf{x}) \in \mathbb{R}$  is strictly concave;
3. each component function  $D \ni \mathbf{x} \mapsto g_j(\mathbf{x}) \in \mathbb{R}$  of the vector function  $D \ni \mathbf{x} \mapsto \mathbf{g}(\mathbf{x}) \in \mathbb{R}^m$  is convex.

Suppose that the pair  $(\mathbf{p}, \mathbf{x}^*) \in \mathbb{R}^m \times D$  jointly satisfy the sufficient conditions for maximizing the Lagrangian while also meeting the complementary slackness conditions.

Then it is **necessary** that the only possible maximum satisfy these sufficient conditions!

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

# Statement of General Problem

Given the time interval  $[t_0, t_1] \subset \mathbb{R}$ ,  
consider the general one-variable optimal control problem  
of choosing paths:

1.  $[t_0, t_1] \ni t \mapsto x(t) \in \mathbb{R}$  of **states**;
2.  $[t_0, t_1] \ni t \mapsto u(t) \in \mathbb{R}$  of **controls**.

The **objective functional** is taken to be the integral

$$\int_{t_0}^{t_1} f(t, x(t), u(t)) dt$$

We fix the **initial state**  $x(t_0) = x_0$ , where  $x_0$  is given.

We leave the **terminal state**  $x(t_1)$  free.

Finally, we impose the **dynamic constraint**  $\dot{x} = g(t, x, u)$   
at every time  $t \in [t_0, t_1]$ .

## The Lagrangian Integral

Consider the path  $[t_0, t_1] \ni t \mapsto p(t) \in \mathbb{R}$   
of a single **costate variable** or **shadow price**  $p$ .

Here  $p(t)$  is the Lagrange multiplier  
associated with the dynamic constraint at time  $t$ .

Then, after dropping the time argument from  $p$ ,  $x$  and  $u$ ,  
the associated “Lagrangian integral” is

$$\mathcal{L} = \int_{t_0}^{t_1} f(t, x, u) dt - \int_{t_0}^{t_1} p[\dot{x} - g(t, x, u)] dt$$

Because  $\frac{d}{dt} p x = \dot{p} x + p \dot{x}$ , integrating by parts  
gives  $\int_{t_0}^{t_1} p \dot{x} dt = - \int_{t_0}^{t_1} \dot{p} x dt + \Big|_{t_0}^{t_1} p x$  and so

$$\mathcal{L} = \int_{t_0}^{t_1} [f(t, x, u) + \dot{p} x + p g(t, x, u)] dt - \Big|_{t_0}^{t_1} p x$$

# The Hamiltonian

## Definition

For the problem of maximizing  $\int_{t_0}^{t_1} f(t, x, u) dt$   
subject to  $\dot{x} = g(t, x, u)$ ,  
the **Hamiltonian function** is defined as

$$H(t, x, u, p) := f(t, x, u) + p g(t, x, u) \quad \square$$

With this definition, the integral part of the Lagrangian, which is

$$\int_{t_0}^{t_1} [f(t, x, u) + \dot{p} x + p g(t, x, u)] dt$$

can be written as  $\int_{t_0}^{t_1} [H(t, x, u, p) + \dot{p} x] dt$ .

# The Maximum Principle

Recall the definition  $H(t, x, u, p) := f(t, x, u) + p g(t, x, u)$ .

## Definition

According to the **maximum principle**, for a.e.  $t \in [t_0, t_1]$ , an **optimal control** should satisfy

$$u^*(t) \in \arg \max_u H(t, x, u, p) \text{ where } x = x(t) \text{ and } p = p(t)$$

Moreover the co-state variable  $p(t)$  should evolve according to the vector differential equation

$$\dot{p} = -H'_x(t, x, u, p)$$

where  $H'_x(t, x, u, p)$  denotes the partial gradient vector of the Hamiltonian  $H$  w.r.t. the state vector  $x$ .

# The “Dorfmanian” as an Extended Hamiltonian

Robert Dorfman (1969)

“An Economic Interpretation of Optimal Control Theory”  
*American Economic Review* 59 (5): 817–831.

His Theorem 1 on p. 829 states a maximum principle that uses an extended Hamiltonian, which should therefore be called the “Dorfmanian”.

Referred to in Olivier de la Grandville (2009)

“Other major tools for optimal growth theory:  
The Pontryagin maximum principle and the Dorfmanian”  
in *Economic Growth: A Unified Approach* (Cambridge)  
ch. 8, pp. 199–209.

# An Extended Maximum Principle

## Definition

We add an extra term  $\dot{p}x$  to the Hamiltonian  $H(t, x, u, p)$  in order to obtain the **Dorfmanian** or **extended Hamiltonian**

$$\tilde{H}(t, x, u, p) := H(t, x, u, p) + \dot{p}x = f(t, x, u) + pg(t, x, u) + \dot{p}x$$

According to the **extended maximum principle**, for a.e. (almost every) time  $t \in [t_0, t_1]$ , one should have

$$(u^*(t), x^*(t)) \in \arg \max_{(u, x)} \tilde{H}(t, x, u, p(t))$$

## Remark

*The first-order conditions for maximizing  $\tilde{H}(t, x, u, p)$  include*

$$\dot{p} = -f'_x(t, x, u) - pg'_x(t, x, u) = -H'_x(t, x, u, p)$$

*as required by the maximum principle.*

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## A Macro Quadratic Control Problem: Statement

Let  $c > 0$  denote an **adjustment cost parameter**.

Consider the problem of choosing the path  $t \mapsto (u(t), x(t)) \in \mathbb{R}^2$  in order to **minimize** the quadratic integral  $\int_0^T (x^2 + cu^2) dt$  subject to the dynamic constraint  $\dot{x} = u$ , as well as the initial condition  $x(0) = x_0$  and the terminal condition allowing  $x(T)$  to be chosen freely.

The associated Hamiltonian is

$$H = -x^2 - cu^2 + pu$$

with a minus sign to convert the minimization problem into a maximization problem.

The associated extended Hamiltonian, including the extra term  $\dot{p}x$ , is

$$\tilde{H} = -x^2 - cu^2 + pu + \dot{p}x$$

## First-Order Conditions

Consider the problem of maximizing, at any time  $t \in [0, T]$ , either the Hamiltonian  $H = -x^2 - cu^2 + pu$ ,  
or the extended Hamiltonian  $\tilde{H} = -x^2 - cu^2 + pu + \dot{p}x$

The first-order conditions include  $0 = H'_u = \tilde{H}'_u = -2cu + p$ .

Either of these two equivalent conditions implies that  $u^* = p/2c$ .

A second first-order condition

for maximizing the extended Hamiltonian  $\tilde{H}$  w.r.t.  $x$   
is the co-state differential equation  $\dot{p} = -H'_x(t, x, u, p) = 2x$ .

Combining this co-state differential equation

with the dynamic constraint  $\dot{x} = u$

leads to the following **coupled pair** of differential equations:

$$\dot{p} = -H'_x = 2x \quad \text{and} \quad \dot{x} = u^* = p/2c$$

## Example: Solving the Coupled Pair

In order to solve the coupled pair

$$\dot{p} = 2x \quad \text{and} \quad \dot{x} = p/2c$$

- ▶ differentiate the first equation w.r.t.  $t$  to obtain  $\ddot{p} = 2\dot{x}$ ;
- ▶ in this last equation  $\ddot{p} = 2\dot{x}$ , substitute  $\dot{x} = p/2c$  which leads to  $\ddot{p} = 2\dot{x} = p/c$ .

This leads us to consider the second-order differential equation

$$\ddot{p} = p/c$$

in  $p$ , whose associated characteristic equation is  $\lambda^2 - 1/c = 0$ .

The two roots are  $\lambda_{1,2} = \pm c^{-1/2} = \pm r$  where  $r := c^{-1/2}$ .

The general solution of the homogeneous equation  $\ddot{p} = p/c$  is  $p = Ae^{rt} + Be^{-rt}$  for arbitrary constants  $A$  and  $B$ .

## Explicit Solution

In addition to  $p = Ae^{rt} + Be^{-rt}$  with  $r := c^{-1/2}$  and  $\dot{p} = 2x$ , we also have  $\dot{x} = p/2c$ , along with the initial condition  $x(0) = x_0$  and the terminal condition  $p(T) = 0$ .

This terminal condition implies  $Ae^{rT} + Be^{-rT} = 0$ , from which one obtains  $B = -Ae^{2rT}$ .

Also differentiating  $p = Ae^{rt} + Be^{-rt}$  w.r.t.  $t$  implies  $\dot{p} = r(Ae^{rt} - Be^{-rt})$ .

At time  $t = 0$  one has  $\dot{p}(0) = 2x_0$  and so  $r(A - B) = 2x_0$ .

Substituting  $B = -Ae^{2rT}$  gives  $r(A + Ae^{2rT}) = 2x_0$ , so  $A = 2x_0/r(1 + e^{2rT}) = 2x_0e^{-rT}/r(e^{-rT} + e^{rT})$  implying that  $B = -2x_0e^{rT}/r(e^{-rT} + e^{rT})$ .

So  $p = Ae^{rt} + Be^{-rt} = 2x_0(e^{-r(T-t)} - e^{r(T-t)})/r(e^{-rT} + e^{rT})$

and  $x = \dot{p}/2 = x_0(e^{-r(T-t)} + e^{r(T-t)})/(e^{-rT} + e^{rT})$ .

Also  $u = \dot{x} = rx_0(e^{-r(T-t)} - e^{r(T-t)})/(e^{-rT} + e^{rT})$ .

## The Case of an Infinite Horizon

Multiply both numerator and denominator of the right-hand side of each equation by  $e^{-rT}$ , leading to the explicit solution:

$$\begin{aligned}p(t) &= \frac{2x_0 [e^{-r(T-t)} - e^{r(T-t)}]}{r [e^{-rT} + e^{rT}]} = \frac{2x_0 [e^{-r(2T-t)} - e^{-rt}]}{r(e^{-2rT} + 1)} \\x(t) &= \frac{x_0 [e^{-r(T-t)} + e^{r(T-t)}]}{r(e^{-rT} + e^{rT})} = \frac{x_0 [e^{-r(2T-t)} + e^{-rt}]}{r(e^{-2rT} + 1)} \\u(t) &= \frac{x_0 [e^{-r(T-t)} - e^{r(T-t)}]}{e^{-rT} + e^{rT}} = \frac{x_0 [e^{-r(2T-t)} - e^{-rt}]}{e^{-2rT} + 1}\end{aligned}$$

Taking the limit as  $T \rightarrow \infty$ , one has  $p(t) \rightarrow -2x_0 e^{-rt}/r$ .

Similarly  $x(t) = \frac{1}{2}\dot{p} \rightarrow x_0 e^{-rt}$ , and  $u(t) = \dot{x}(t) \rightarrow -x_0 e^{-rt}$ .

Finally,  $(p(t), x(t), u(t)) \rightarrow (0, 0, 0)$  as  $t \rightarrow \infty$ .

See page 311 of FMEA.

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## Mangasarian and Arrow's Sufficient Conditions

At any fixed time  $t$ , let  $(\mathbf{x}^*(t), \mathbf{u}^*(t))$  be a stationary point w.r.t.  $(\mathbf{x}, \mathbf{u})$  of the extended Hamiltonian

$$\tilde{H}(t, \mathbf{x}, \mathbf{u}, \mathbf{p}(t)) := H(t, \mathbf{x}, \mathbf{u}, \mathbf{p}(t)) + \dot{\mathbf{p}}^\top(t) \mathbf{x}$$

That is, suppose that the respective partial gradients satisfy

$$H'_{\mathbf{u}}(t, \mathbf{x}^*(t), \mathbf{u}^*(t), \mathbf{p}(t)) = 0 \quad \text{and} \quad \dot{\mathbf{p}}(t) = -H'_x(t, \mathbf{x}^*(t), \mathbf{u}^*(t), \mathbf{p}(t))$$

Here are two alternative sufficient conditions for  $(\mathbf{x}^*(t), \mathbf{u}^*(t))$  to maximize the extended Hamiltonian.

1. See FMEA Theorem 9.7.1, due to Mangasarian.

Suppose that  $(\mathbf{x}, \mathbf{u}) \mapsto H(t, \mathbf{x}, \mathbf{u}, \mathbf{p}(t))$  is concave, which implies that  $(\mathbf{x}, \mathbf{u}) \mapsto \tilde{H}(t, \mathbf{x}, \mathbf{u}, \mathbf{p}(t))$  is also concave.

2. See FMEA Theorem 9.7.2, due to Arrow.

Define  $\hat{H}(t, \mathbf{x}, \mathbf{p}(t)) := \max_{\mathbf{u}} H(t, \mathbf{x}, \mathbf{u}, \mathbf{p}(t))$ , and suppose that  $\mathbf{x} \mapsto \hat{H}(t, \mathbf{x}, \mathbf{p}(t))$  is concave.

## Sufficient Conditions

Consider the single variable problem  
of choosing the paths  $t \mapsto (x(t), u(t)) \in \mathbb{R}^2$   
in order to maximize  $\int_0^T f(t, x, u) dt$   
subject to  $\dot{x} \leq g(t, x, u)$  (all  $t \in [0, T]$ )  
as well as  $x(0) \leq x_0$ ,  $x(T) \geq x_T$ .

Including the extra term  $\dot{p}x$ , the extended Hamiltonian is

$$\tilde{H}(t, x, u, p) = f(t, x, u) + p g(t, x, u) + \dot{p}x$$

Suppose that for all  $t \in [0, T]$  the path  $t \mapsto (x^*(t), u^*(t)) \in \mathbb{R}^2$   
satisfies the **extended maximization condition**

$$(x^*(t), u^*(t)) \in \arg \max_{x, u} \tilde{H}(t, x, u, p(t))$$

as well as the three complementary slackness conditions:

1.  $p(t) \geq 0$ ,  $\dot{x}^*(t) \leq g(t, x^*(t), u^*(t))$  (comp) (all  $t \in [0, T]$ );
2.  $p(0) \geq 0$ ,  $x^*(0) \leq x_0$  (comp);
3.  $p(T) \geq 0$ ,  $x^*(T) \geq x_T$  (comp).

## Proof of Sufficiency, I

Consider any alternative feasible path  $t \mapsto (x(t), u(t))$  satisfying all the constraints.

Define  $D(\mathbf{x}, \mathbf{u}) := \int_0^T [f(t, x(t), u(t)) - f(t, x^*(t), u^*(t))] dt$ .

After dropping the time arguments from  $x(t), u(t), x^*(t), u^*(t)$ , the definition  $\tilde{H} = f + pg + p\dot{x}$  implies that

$$D(\mathbf{x}, \mathbf{u}) = \int_0^T \left\{ \left[ \tilde{H}(t, x, u, p) - pg(t, x, u) - \dot{p}x \right] - \left[ \tilde{H}(t, x^*, u^*, p) - pg(t, x^*, u^*) - \dot{p}x^* \right] \right\} dt$$

The maximization hypothesis implies that, for all  $t \in (0, T)$ , one has  $\tilde{H}(t, x(t), u(t), p(t)) \leq \tilde{H}(t, x^*(t), u^*(t), p(t))$ .

From this it follows that

$$D(\mathbf{x}, \mathbf{u}) \leq \int_0^T \{ [-pg(t, x, u) - \dot{p}x] - [-pg(t, x^*, u^*) - \dot{p}x^*] \} dt$$

## Proof of Sufficiency, II

We have shown that

$$D(\mathbf{x}, \mathbf{u}) \leq \int_0^T \{[-p g(t, x, u) - \dot{p} x] - [-p g(t, x^*, u^*) - \dot{p} x^*]\} dt$$

But feasibility implies that  $\dot{x}(t) \leq g(t, x, u)$

and prices satisfy  $p(t) \geq 0$ , so  $p(t) \dot{x}(t) \leq p(t) g(t, x, u)$ .

Furthermore, the complementary slackness conditions for optimality imply that  $p(t) g(t, x^*(t), u^*(t)) = p(t) \dot{x}^*(t)$ .

It follows that

$$\begin{aligned} D(\mathbf{x}, \mathbf{u}) &\leq \int_0^T [-p \dot{x} - \dot{p} x + p \dot{x}^* + \dot{p} x^*] dt \\ &= \int_0^T \frac{d}{dt} [-p(t) x(t) + p(t) x^*(t)] dt \\ &= -p(T) [x(T) - x^*(T)] + p(0) [x(0) - x^*(0)] \end{aligned}$$

## Proof of Sufficiency, III

So far, we have shown that

$$D(\mathbf{x}, \mathbf{u}) \leq -p(T) [x(T) - x^*(T)] + p(0) [x(0) - x^*(0)]$$

But, together with feasibility and non-negativity of prices, the second and third complementary slackness conditions regarding the endpoints at times  $t = 0$  and  $t = T$  imply that

$$\begin{aligned} p(T)x(T) &\geq p(T)x_T & ; & & p(T)x^*(T) &= p(T)x_T & ; \\ p(0)x(0) &\leq p(0)x_0 & ; & & p(0)x^*(0) &= p(0)x_0 . \end{aligned}$$

It follows that

$$p(T)x(T) \geq p(T)x^*(T) \quad \text{and} \quad p(0)x(0) \leq p(0)x^*(0)$$

which together imply that  $D(\mathbf{x}, \mathbf{u}) \leq 0$ .

Finally, after recalling the definition

$$D(\mathbf{x}, \mathbf{u}) := \int_0^T [f(t, x(t), u(t)) - f(t, x^*(t), u^*(t))] dt$$

one concludes that the path  $t \mapsto (x^*(t), u^*(t))$  is optimal. □

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

**Infinite Horizon Case**

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## The Infinite Horizon Problem

We consider the problem of choosing  $[0, \infty) \ni t \mapsto (x(t), u(t))$  to maximize the **infinite horizon** objective functional

$$\int_0^{\infty} f(t, x(t), u(t)) dt$$

subject to  $\dot{x} = g(t, x, u)$  at every time  $t \in [0, \infty)$ , as well as  $x(0) = x_0$ , where  $x_0$  is given.

As before, the extended maximum principle suggests looking for a path  $[0, \infty) \ni t \mapsto p(t)$  of co-state variables, as well as a path  $[0, \infty) \ni t \mapsto (x^*(t), u^*(t))$  of the state and control variables which maximizes the extended Hamiltonian

$$\tilde{H}(t, x, u, p) := f(t, x, u) + p(t)g(t, x, u) + \dot{p}(t)x$$

— i.e., for (almost) all  $t \in [0, \infty)$  one has

$$(x^*(t), u^*(t)) \in \arg \max_{(u, x)} \tilde{H}(t, x, u, p)$$

## Implications of the Extended Maximum Principle, I

Consider any alternative feasible path  $t \mapsto (x(t), u(t))$  satisfying all the constraints.

We start by repeating our earlier argument for a finite horizon.

Define  $D^T(\mathbf{x}, \mathbf{u}) := \int_0^T [f(t, x(t), u(t)) - f(t, x^*(t), u^*(t))] dt$ .

After dropping the time arguments from  $x(t), u(t), x^*(t), u^*(t)$ , this difference  $D^T(\mathbf{x}, \mathbf{u})$  equals

$$\int_0^T \left\{ \left[ \tilde{H}(t, x, u, p) - p g(t, x, u) - \dot{p} x \right] - \left[ \tilde{H}(t, x^*, u^*, p) - p g(t, x^*, u^*) - \dot{p} x^* \right] \right\} dt$$

The extended maximum principle implies that for all  $t \in [0, T]$  one has

$$\tilde{H}(t, x(t), u(t), p(t)) \leq \tilde{H}(t, x^*(t), u^*(t), p(t))$$

## Implications of the Extended Maximum Principle, II

Arguing as before, from  $(x^*(t), u^*(t)) \in \arg \max_{(u,x)} \tilde{H}(t, x, u, p)$  where  $\tilde{H}(t, x, u, p) := f(t, x, u) + p(t)g(t, x, u) + \dot{p}(t)x$ , it follows that for all finite  $T$  the difference  $D^T(\mathbf{x}, \mathbf{u})$  satisfies

$$\begin{aligned} D^T(\mathbf{x}, \mathbf{u}) &:= \int_0^T [f(t, x(t), u(t)) - f(t, x^*(t), u^*(t))] dt \\ &= \int_0^T \left\{ \left[ \tilde{H}(t, x, u, p) - p g(t, x, u) - \dot{p} x \right] \right. \\ &\quad \left. - \left[ \tilde{H}(t, x^*, u^*, p) - p g(t, x^*, u^*) - \dot{p} x^* \right] \right\} dt \\ &= \int_0^T \left[ \tilde{H}(t, x, u, p) - \tilde{H}(t, x^*, u^*, p) \right] dt \\ &\quad - \int_0^T [p g(t, x, u) + \dot{p} x - p g(t, x^*, u^*) - \dot{p} x^*] dt \\ &\leq - \int_0^T [p \dot{x} + \dot{p} x - p \dot{x}^* - \dot{p} x^*] dt \\ &= - \int_0^T \frac{d}{dt} [p x - p x^*] dt \\ &= -p(T) [x(T) - x^*(T)] + p(0) [x(0) - x^*(0)] \\ &= p(T) [x^*(T) - x(T)] \text{ given that } x(0) = x^*(0) = x_0 \end{aligned}$$

## A Transversality Condition

Consider the **transversality** condition

$$\limsup_{T \rightarrow \infty} \rho(T) [x^*(T) - x(T)] = 0$$

If this were satisfied, it would imply that

$$\begin{aligned} 0 &\geq \limsup_{T \rightarrow \infty} D^T(\mathbf{x}, \mathbf{u}) \\ &= \limsup_{T \rightarrow \infty} \int_0^T [f(t, x(t), u(t)) - f(t, x^*(t), u^*(t))] dt \end{aligned}$$

In the case when

$$\int_0^T f(t, x^*(t), u^*(t)) dt \rightarrow \int_0^\infty f(t, x^*(t), u^*(t)) dt$$

as  $T \rightarrow \infty$ , it would imply that

$$\limsup_{T \rightarrow \infty} \int_0^T f(t, x(t), u(t)) dt \leq \int_0^\infty f(t, x^*(t), u^*(t)) dt$$

## Malinvaud's Transversality Condition

Edmond Malinvaud (1953) "Capital Accumulation and Efficient Allocation of Resources" *Econometrica* 21: 233–268.

In many economic contexts, feasibility requires that, for all  $t$ , one has both  $x(t) \geq 0$  and  $\dot{x}(t) \leq g(t, x(t), u(t))$ .

Then, since  $p(t) \geq 0$ ,

for any alternative feasible path  $x(t)$  and any terminal time  $T$ , one has  $p(T) [x^*(T) - x(T)] \leq p(T) x^*(T)$ .

### Definition

The **Malinvaud transversality condition**

is that  $p(T) x^*(T) \rightarrow 0$  as  $T \rightarrow \infty$ .

When this Malinvaud transversality condition is satisfied, evidently

$$\limsup_{T \rightarrow \infty} p(T) [x^*(T) - x(T)] \leq \limsup_{T \rightarrow \infty} p(T) x^*(T) = 0$$

Hence, the general transversality condition is also satisfied.

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time

Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians

Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case

Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited

Application to an Optimal Growth Problem

## A Problem with Exponential Discounting

Consider the general problem of choosing paths:

1.  $[t_0, t_1] \ni t \mapsto x(t) \in \mathbb{R}$  of **states**;
2.  $[t_0, t_1] \ni t \mapsto u(t) \in \mathbb{R}$  of **controls**.

The **objective functional** is taken to be the integral

$$\int_{t_0}^{t_1} e^{-rt} f(x(t), u(t)) dt$$

where: (i)  $f$  is independent of  $t$ ;  
(ii) there is a constant discount rate  $r$   
and associated exponential discount factor  $e^{-rt}$ .

Assume too that the dynamic constraint is  $\dot{x} = g(x, u)$ ,  
at every time  $t \in [t_0, t_1]$ , where  $g$  is independent of  $t$ .

Fix the **initial state**  $x(t_0) = x_0$ , where  $x_0$  is given.

But leave the **terminal state**  $x(t_1)$  free.

## Present versus Current Value Hamiltonian

Up to now, we have considered the **present value Hamiltonian**

$$H(t, x, u, p) := e^{-rt} f(x, u) + p g(x, u)$$

We remove the discount factor  $e^{-rt}$   
by defining the **current value Hamiltonian**

$$H^C(x, u, q) := f(x, u) + q g(x, u)$$

with the **current value co-state variable**  $q := e^{rt} p$ .

These definitions imply that

$$H(t, x, u, p) = e^{-rt} [f(x, u) + e^{rt} p g(x, u)] = e^{-rt} H^C(x, u, q)$$

where  $q = e^{rt} p$ , so  $\dot{q} = r e^{rt} p + e^{rt} \dot{p} = r q + e^{rt} \dot{p}$ .

## Present and Current Value Maximum Principles

The (present value) maximum principle states that for (almost) all  $t \in [0, \infty)$  one has

$$u^*(t) \in \arg \max_u H(t, x, u, p) \quad \text{and} \quad \dot{p} = -H'_x(t, x, u, p)$$

By definition, one has  $H(t, x, u, p) = e^{-rt} H^C(x, u, q)$  where  $q = e^{rt} p$ .

Because  $e^{-rt}$  is independent of  $u$ , it follows that  $u^*(t) \in \arg \max_u H^C(x, u, q)$ .

Also  $\dot{q} - rq = e^{rt} \dot{p} = -e^{rt} H'_x(t, x, u, p) = -(H^C)'_x(x, u, q)$ .

We have derived the **current value** maximum principle, which states that for (almost) all  $t \in [0, \infty)$  one has

$$u^*(t) \in \arg \max_u H^C(x, u, q) \quad \text{and} \quad \dot{q} - rq = -(H^C)'_x(x, u, q)$$

# Outline

## Introduction

A Basic Optimal Growth Problem in Continuous Time  
Digression: Sufficient Conditions for Static Optimality

## The Maximum Principle

From Lagrangians to Hamiltonians  
Example: A Macroeconomic Quadratic Control Problem

## Sufficient Conditions for Optimality

Finite Horizon Case  
Infinite Horizon Case

## Discounting and the Current Value Hamiltonian

Maximum Principle Revisited  
Application to an Optimal Growth Problem

# Statement of the Problem

The problem will be to choose:

1. a consumption stream  $\mathbb{R}_+ \ni t \mapsto C(t) \in \mathbb{R}_{++}$ ;
2. a stream  $\mathbb{R}_+ \ni t \mapsto K(t) \in \mathbb{R}_{++}$  of capital stocks.

At any time  $t$ , given capital  $K$ , output will be  $Y = aK - bK^2$ , where  $a, b \in \mathbb{R}$  are positive parameters, with  $a > r > 0$ .

Output is divided between consumption  $C$  and investment  $\dot{K}$ , so  $\dot{K} = Y - C$ ; there is no depreciation.

The planner's objective is to maximize the utility integral  $\int_0^\infty e^{-rt} u(C(t)) dt$ .

We assume that the utility function  $\mathbb{R}_{++} \ni C \mapsto u(C)$  takes the isoelastic form with  $u'(C) = C^{-\epsilon}$ .

The constant elasticity parameter  $\epsilon > 0$  is a constant degree of relative fluctuation aversion.

## The Current Value Maximum Principle

The optimal growth problem is to maximize  $\int_0^{\infty} e^{-rt} u(C(t)) dt$  subject to  $\dot{K} = aK - bK^2 - C$  where  $u'(C) = C^{-\epsilon}$ .

With  $\lambda$  as the co-state variable, the current value Hamiltonian is

$$H^C(K, C) := u(C) + \lambda(aK - bK^2 - C)$$

The first-order condition for maximizing  $(K, C) \mapsto H^C(K, C)$  w.r.t.  $C$  is  $u'(C) = \lambda$ , which implies  $C^{-\epsilon} = \lambda$  and so  $C = \lambda^{-1/\epsilon}$ .

Because  $C \mapsto u(C)$  is strictly concave, this is the unique maximum.

The co-state variable evolves according to the equation

$$\dot{\lambda} - r\lambda = -H_K^C(K, C) = -\lambda(a - 2bK)$$

Finally, therefore, we have the coupled differential equations

$$\dot{K} = aK - bK^2 - \lambda^{-1/\epsilon} \quad \text{and} \quad \dot{\lambda} = \lambda(r - a + 2bK)$$

# Steady State of Coupled Differential Equations

The coupled differential equations

$$\dot{K} = aK - bK^2 - \lambda^{-1/\epsilon} \quad \text{and} \quad \dot{\lambda} = \lambda(r - a + 2bK)$$

have a steady state at any point satisfying  $\dot{K} = 0$  and  $\dot{\lambda} = 0$ .

There is a unique steady state at the point  $(K, \lambda) = (K^*, \lambda^*)$  with  $K^* = (a - r)/2b$  and  $\lambda^* = [K^*(a - bK^*)]^{-\epsilon}$ .

# Phase Diagram Analysis of Coupled Differential Equations

We have the coupled differential equations

$$\dot{K} = aK - bK^2 - \lambda^{-1/\epsilon} \quad \text{and} \quad \dot{\lambda} = \lambda(r - a + 2bK)$$


with a unique steady state at

$$K^* = (a - r)/2b, \quad \lambda^* = [K^*(a - bK^*)]^{-\epsilon}$$

The phase diagram on the next slide shows:

1. the two “isoclines” where  $\dot{K} = 0$  and  $\dot{\lambda} = 0$  respectively;
2. the intersection of these two isoclines at the unique stationary point  $(K^*, \lambda^*)$ ;
3. the division of the plane of  $(K, \lambda)$  values into four different “phases” according as  $\dot{K} \gtrless 0$  and  $\dot{\lambda} \gtrless 0$ , marked by blue arrows pointing in the relevant direction;
4. six possible different solutions of the coupled equations, which are marked by blue curves.

# Phase Diagram

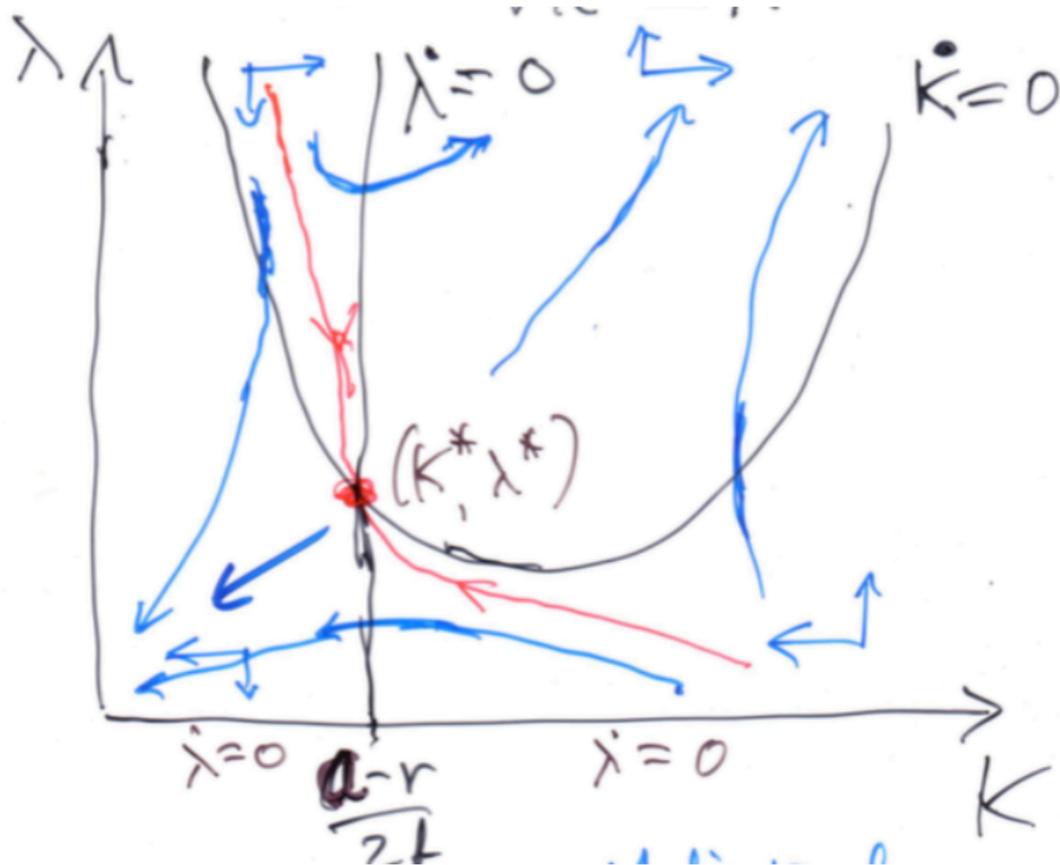

## Suboptimal Solutions to the Differential Equations

Paths of pairs  $(K, \lambda)$  where  $\lambda$  starts out too low,  
and so  $C = \lambda^{-1/\epsilon}$  starts out too high:

1. pass below and to the left of the steady state  $(K^*, \lambda^*)$ ;
2. eventually reach the phase where  $\dot{K} < 0$  and  $\dot{\lambda} < 0$ ;
3. in that profligate phase, where  $K(t)$  reaches 0 in finite time,  
after which there is no output  
and so  $C = K = 0$  for ever thereafter.

Such paths could be optimal for a suitable finite horizon,  
but with an infinite horizon, they end in disaster.

Paths of pairs  $(K, \lambda)$  where  $\lambda$  starts out too high,  
and so  $C = \lambda^{-1/\epsilon}$  starts out too low:

1. pass above and to the right of the steady state  $(K^*, \lambda^*)$ ;
2. eventually reach the phase where  $\dot{K} > 0$  and  $\dot{\lambda} > 0$ ;
3. in that phase of wasteful over-accumulation  
one has  $K(t) \rightarrow \infty$  yet  $C(t) \rightarrow 0$  as  $t \rightarrow \infty$ .

# Optimal Solutions to the Differential Equations

The red curve in the phase diagram shows the unique solution curve that passes through the steady state  $(K^*, \lambda^*)$ .

Along this solution curve where  $(K, \lambda) \rightarrow (K^*, \lambda^*)$  as  $t \rightarrow \infty$  lies the happy medium between:

1. profligacy, where  $K(t)$  reaches 0 in finite time;
2. wasteful over-accumulation, where  $K(t) \rightarrow \infty$  yet  $C(t) \rightarrow 0$  as  $t \rightarrow \infty$ .

Furthermore, the present discounted value  $e^{-rt} \lambda(t) K(t)$  of the capital stock converges to zero.

So the Malinvaud transversality condition is satisfied.

This completes the proof that the path whose graph is the red curve solves the infinite-horizon optimal growth problem.